

# Control Unit C-201W



## What's C-201W

These instruments should be combined with O<sub>2</sub> sensor then control cell temperature and convert cell EMF to O<sub>2</sub> value for display and signal output. This is the special model for abroad that simplified the specification and made reasonable price.

## Features

- ⊙ Easy to handle.
- ⊙ Readable large display.
- ⊙ A lot of functions.  
(Back light, interactive display for setting and calibration, Output hold, Remote calibration etc.)
- ⊙ Serial communication function (RS232C) is normally equipped.


## Specification

		MODEL: C-201W
Dimensions		215W × 292H × 95D
Weight		Approx. 2500g
Power		85~264VAC
Display	Upper	4 figures LED
	Lower	LCD
Display Ranges	R1 : %	0~99.99%
	R2 : ppm	0~9999ppm
Output ※1	DCA	D. C. 4~20mADC/0-1VDC/0-5VDC/0-10VDC (select one of them)
Communication		RS232C
Range Select		Manual / Auto / Remote
Alarm		Output : Hi/Lo, Hi/H·Hi, Lo/L·Lo Failure : Sensor temp. abnormal (Either of open collectors)
Other functions		Cell EMF and/or Cell temp. are shown on lower display. Range answer-back, hold, one-touch calibration equipped.


※1 It is possible to set arbitrarily within the range of the above-mentioned.

※2 For the improvement, the specification and design may be changed without prior notice.

## Introduction drawing

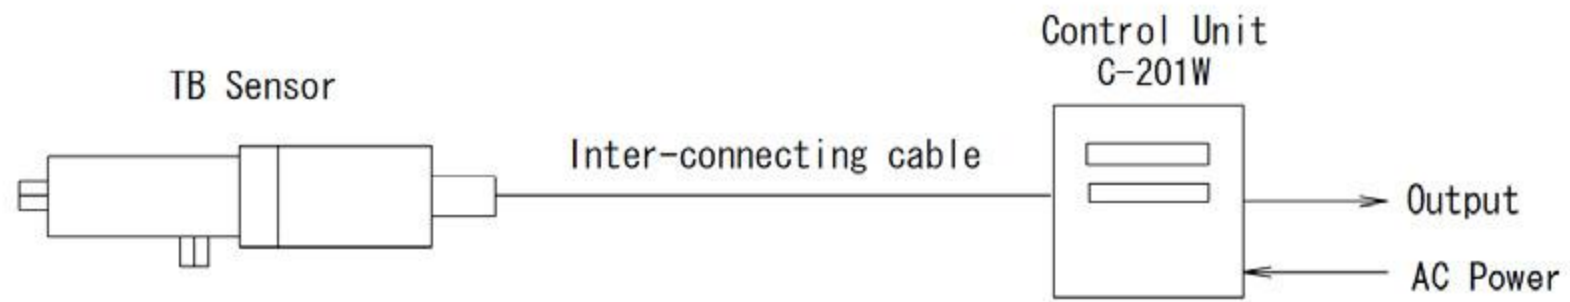

## Dimensions

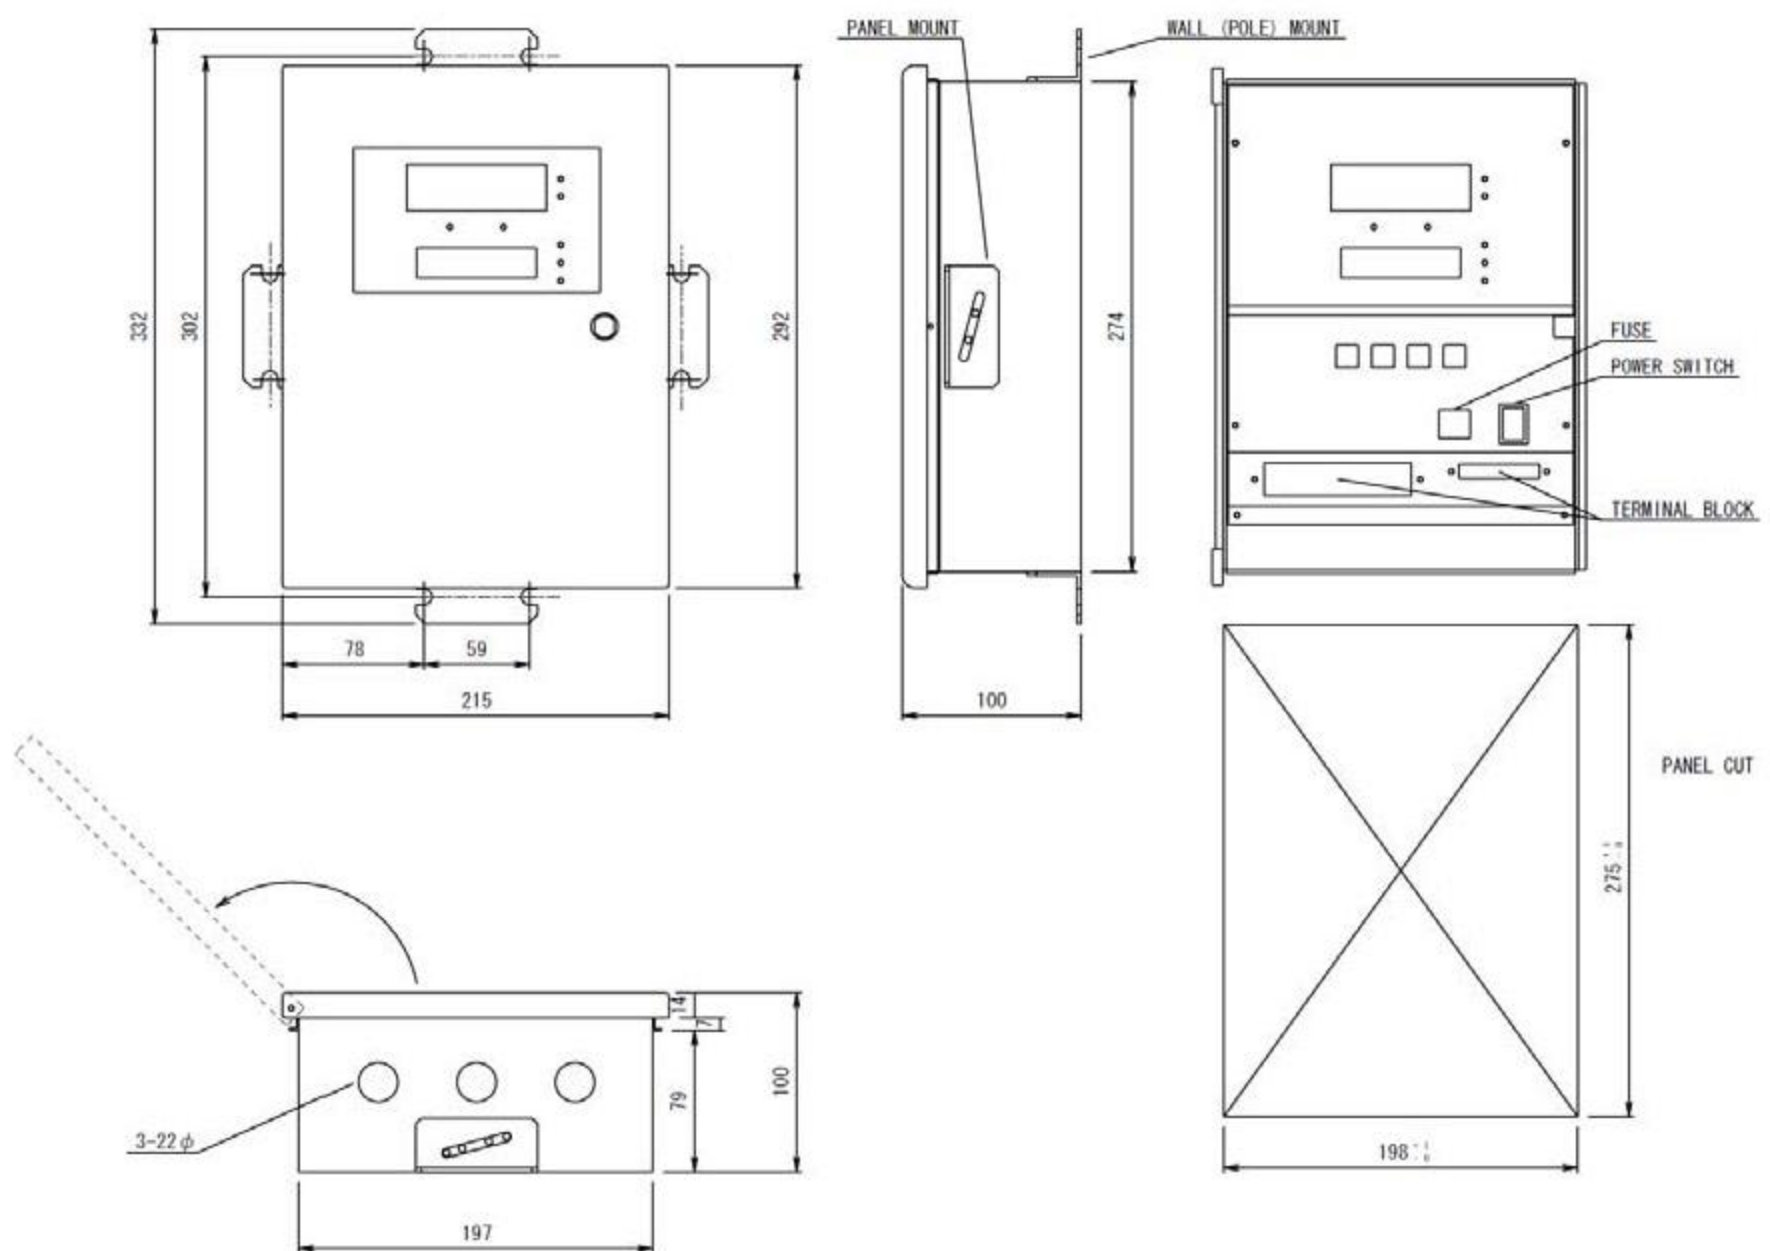

## Inquiry

## Daiichi Nekken CO., LTD

13-22 Nishikura-Cyo Ashiya-City

Hyogo-Prefecture Japan

TEL 0797-31-2410 / FAX 0797-31-8951

URL <http://www.daiichinekken.co.jp>

E-mail [info@daiichinekken.co.jp](mailto:info@daiichinekken.co.jp)